



**GHASSAN ABOUD**  
CVD

# P80KVA9 GENSET

Generating Set Powered By **Perkins STAMFORD**

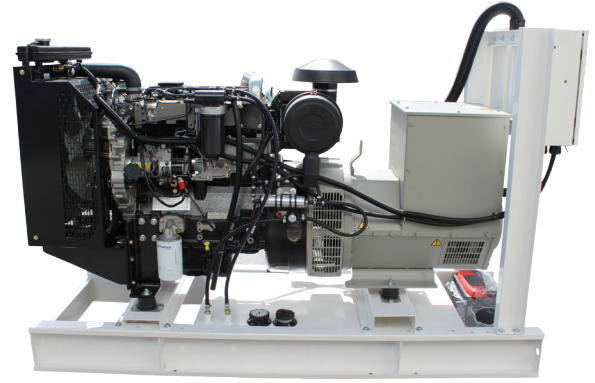


Image for illustration purposes only

## Output Ratings

Generating Set Model	Prime Power	Standby Power
1500rpm, 50 Hz /400V	64KWe / 80KVA	70KWe / 88KVA
1800rpm, 60 Hz /440V	73KWe / 91KVA	80KWe /100KVA

## Genset Specifications

Engine Make & Model	Perkins 1104A44-TG2		
Origin	UK		
Alternator Type	Stamford UCI224G		
Control Panel	Deap Sea - 6110		
Circuit Breaker Type	3 Pole MCCB		
Tropical Cooling System			
Digital Electronic Governor			
Electrical Stop Solenoid, Energized to Run			
Compact Size			
Fuel System	50%	75%	100%
1500rpm, 50 Hz	9.7	14.0	18.7
1800rpm, 60 Hz	11.9	16.9	22.3

\*Prime Power (l/hr)

## International Standards

Engine confirm to ISO 9001:2000, ISO 1400, ISO 10054, ISO 3046, BS 5514, DIN 6271. Alternator confirm to ISO 9001, ISO 14001, BS EN 60034, BS 5000, VDE 0530, NEMA MG32-1, IEC34 CSA C-22.2100, AS 1359, BS 1 6861, B En -6-610002:2001



## RATING GUIDELINES

**PRIME POWER** rating corresponds to ISO Standard Power for continuous operation. It is applicable for supplying electrical power at variable load for an unlimited number of hours instead of commercially purchased power. A10 % overload capability for governing purpose is available for this rating.

**MAXIMUM STANDBY POWER** rating corresponds to ISO Standard Fuel Stop Power. It is applicable for supplying standby electrical power at variable load in areas with well established electrical networks in the event of normal utility power failure. No overload capability is available for this rating. **1 hp = 1 kW x 1.36**

## Engine Technical Data


No. of Cylinders / Alignment	4 / In Line
Cycle	4 - Stroke
Aspiration	Turbocharged
Injection	Direct
Bore, mm	105
Stroke, mm	127
Displacement,l	4.4
Compression Ratio	17.25:1
Starting	12V Electric
Alternators, Amps	12V/65A

## Alternator Technical Data

No. of Bearings	Single Bearing
Insulation System	Class H
Excitation	Self Excited
Voltage Regulator	SX460
Protection	IP23
Temperature Rise,°C	125
Regulation	±1.0%
No. of Phases	3
No. of Poles	4

## Dimensions (m) & Weights (kg)

L(m)	W(m)	H(m)	Weight(kg)	Tank Capacity(L)
2.15	0.75	1.3	975	100



# P80KVA9 GENSET

Generating Set Powered By  Perkins **STAMFORD**

Performances	1500rpm	1800rpm
<b>Alternator Efficiency</b>	90.2%	90.8%
<b>Engine Power</b>		
Prime Power, KWm(hp)	96.4(71.9)	109.9(82)
Standby Power, KWm(hp)	106.1(79.1)	121(90.2)
<b>Alternator</b>		
Prime Power, KWe	68	78

Lubrication System	1500rpm	1800rpm
<b>Oil Consumption (l/hr)</b>	0.15% of fuel consumption at full load	
<b>Oil Sump Capacity, l</b>	7	
<b>Oil System Capacity Include Filters, l</b>	8	

Cooling System	1500rpm	1800rpm
<b>Heat Radiation from Engine and Alternator, Power KW (Standby)</b>	14	15
<b>Heat Rejection to Coolant and Lube Oil at Standby Power, KW</b>	51	57
<b>Radiator Cooling Air Flow, m<sup>3</sup>/min (cfm)</b>	4280(121.2)	4958(140.4)
<b>Coolant Capacity, l</b>	13	13

Intake & Exhaust System	1500rpm	1800rpm
<b>Air Flow Combustion at Standby Power, m<sup>3</sup>/min(cfm)</b>	180(5.14)	230(6.5)
<b>Heat Rejection Exhaust at Standby Power, KW</b>	59	71
<b>Exhaust Gas Temperature at Standby °C</b>	580	560
<b>Max Allowable Back Pressure in Exhaust Line, Kpa</b>	10.0	15.0
<b>Exhaust Gas Flow at Standby Power, m<sup>3</sup>/min(cfm)</b>	470(13.3)	560(15.85)

Accessories	
Oil Drain Pump	Anti-Vibration Pads
Stainless Steel Flexible	Battery Disconnect Switch
Standard Silencer	Fuel Tank Base Frame for 8hrs

## Control Panel Readings

- AC volts, AC currents, DC volts, frequency, rpm, hour counter, power factor.
- Low oil pressure, high water temperature, boost pressure and temperature, KW, KWh, KVA, KVAR, fuel consumption, relative load
- Oil pressure, water temperature, low oil level, high oil temperature
- DC alternator failure, over speed, over crank (Fail to start), over under voltage, over under current, any sensor failure
- Low coolant level - Configurable inputs & outputs
- Upgradable for GSM network connection, Signal SMS messages.

## Optional Equipment

### • Engine

- Coolant heater
- Oversize batteries
- Extra fuel pre-filter water separator

### • Alternator

- Permanent magnet generator (PMG)
- Upgrade to 3 phase sensing AVR
- Qadrature droop kit
- Anti-condensation heater
- Air inlet filters

### • General

- Upgrade to modular controller for paralleling
- Upgrade to 4 pole circuit breaker
- Battery charger
- Automatic transfer switch
- Fuel level switch High / Low for alarm and control
- Fuel transfer pump Automatic / Manual
- Residential grade silencer
- Weather protective and acoustic enclosure.

## Spare Parts Kit (Optional) Genuine - Perkins

Oil filter, full flow	(1)
Fuel filter	(1)
Air filter	(1)
Fan belt set	(1)
Alternator belt set	(1)